




## X-RAY INSPECTION SYSTEM

MULTI HEAD FOR TINS AND JARS

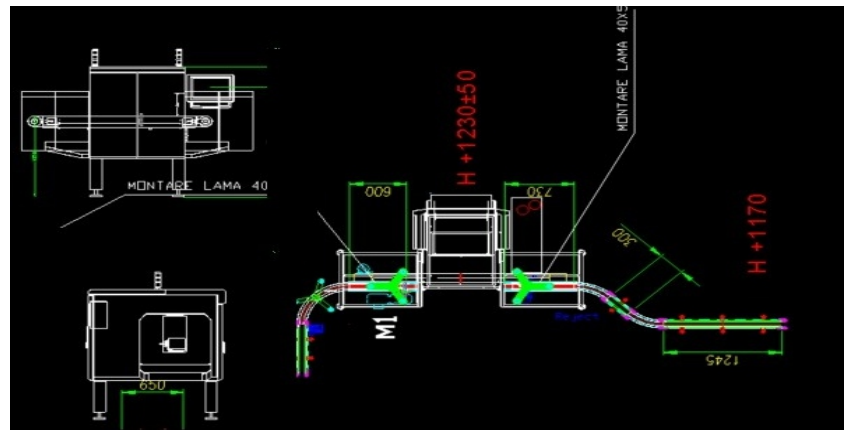

Description	Value
X-ray generator	1000W / 100 kV Metal Ceramic X-Ray
Inspection mode	3 axes adjustable robot guidance
Length, Width, Height	L 3750 x W 2010 x H 1750 (incl. standard tunnels)
Weight	Kg 1100 (incl. standard tunnels)
Power supply	220V, AC, 50/60Hz - power consumption 6 kW
Max- inspection speed	20-80m/min
Max. product dimensions	Ø 120 mm, H 215 mm detector 256x0.4 Ø 170 mm, H 270 mm option detector 400x0.4
Inspection conveyor width	Table Top: 110 - 170
Reject table	Gravity rejection mode
Equipped with sensor to check the correct ejection	Motorized conveyor option: 170mm. x 1500mm
Pneumatic reject system	(1200 bpm.), double rejection - deviator and ejector